



PROJECT : _____
 LOCATION : _____
 TYPE OF LUMINAIRE : _____
 PRODUCT DATASHEET



Hotel Series



Trim For Hotel Series

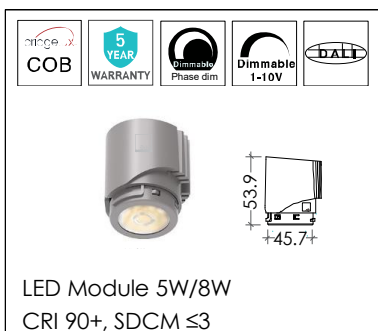

HOTEL Series

Recessed Downlight, 5W / 8W

GENERAL

IP20 Indoor lighting type
 IP44 Option
 recessed / fixed/adjust./round / square

SPECIFICATION

Material : Die-cast aluminum body.
 Frame Color : Black
 Trim Color : White, Black
 Optical : cut-off 38° (UGR<19)

LED LAMPS

Module COB M50
 CRI : 90+
 Color Consistency : SDCM ≤3
 CCT : 2700K, 3000K, 4000K
 Beam angle : 15°, 24°, 38°, 50°
 Average lifetime : 50,000h@80% (L80)
 Warranty : 5 years limited warranty

ELECTRICAL (driver)

Input voltage : 220-240V, 50/60Hz
 Power factor : >0.9

INSTALLATION

Recessed mounted.

ANTI-GLARE ACCESSORY

☐ Honeycomb filter ☐ Soft lens



SECONDARY REFLECTOR COLOR

☐ Matte Black
☐ Matte White
☐ Matte Silver




DIMMING CONTROL


☐ N = On-off ☐ T = Phase dim
☐ V = 0/1-10V ☐ D = DALI
☐ C = CASAMBI

DRAWING (mm) : Trim For Hotel Series


N51RA01

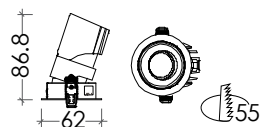


N51RA01T (Trimless)

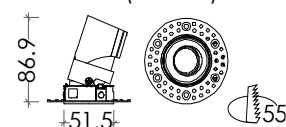

N51RF01

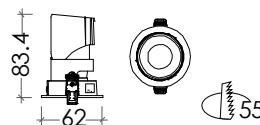

N51RF01T (Trimless)

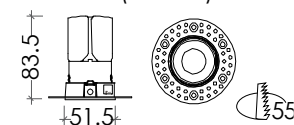

ORDER INFORMATION



CODE No.	LED POWER (W/LUMEN)	TRIM COLOR	CRI (Ra)	CCT (K)	BEAM (D)
☐ N51RA01 round/ adjust.	☐ L03 - 5W 385lm	☐ W White	☐ 90+ SDCM ≤3	☐ 2700K ☐ 3000K ☐ 4000K	☐ 15° ☐ 24° ☐ 38° ☐ 50°
☐ N51RF01 round / fixed	☐ L05 - 8W 551lm	☐ B Black			
☐ N51RA01T round / adjust. trimless					
☐ N51RF01T round / fixed trimless					

PROJECT : _____
 LOCATION : _____
 TYPE OF LUMINAIRE : _____
 PRODUCT DATASHEET



DEEP ANTI GLARE Series

Recessed Downlight (Low UGR<9), 10W / 15W

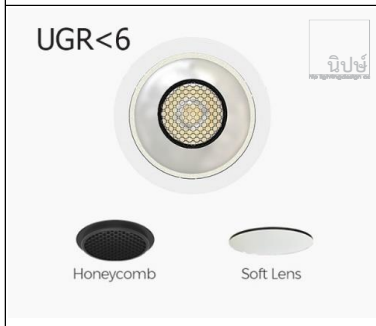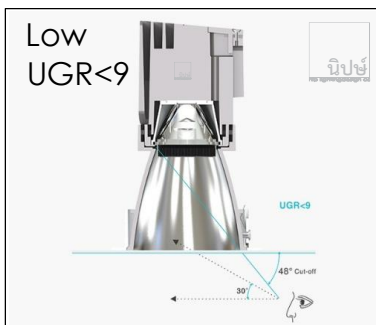

GENERAL
 IP20 Indoor lighting type
 IP44 Option
 recessed / fixed / round / square

SPECIFICATION
 Material : Die-cast aluminum body.
 Frame Color : Black
 Trim Color : White, Black
 Optical : cut-off 48° (UGR<9)

LED LAMPS
 Module COB M60
 CRI : 90+
 Color Consistency : SDCM ≤3
 CCT : 2700K, 3000K, 4000K
 Beam angle : 15°, 24°, 38°, 50°
 Average lifetime : 50,000h@80% (L80)
 Warranty : 5 years limited warranty

INSTALLATION
 Recessed mounted.

ELECTRICAL (driver)
 Input voltage : 220-240V, 50/60Hz
 Power factor : >0.9


ANTI-GLARE ACCESSORY




DIMMING CONTROL

☐ N = On-off ☐ T = Phase dim
☐ V = 0/1-10V ☐ D = DALI
☐ C = CASAMBI ☐ D2 = D2W

SECONDARY REFLECTOR COLOR



DRAWING (mm) : Trim For Deep Anti-glare Series

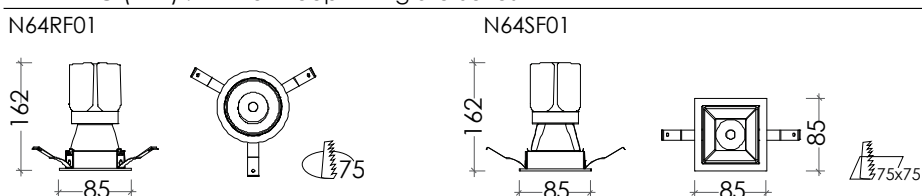

ORDER INFORMATION


CODE No.	LED POWER (W/LUMEN)	TRIM COLOR	CRI (Ra)	CCT (K)	BEAM (D)
☐ N64RF01 round / fixed	☐ L09 - 10W 924lm	☐ W White	☐ 90+ SDCM ≤3	☐ 2700K ☐ 3000K ☐ 4000K	☐ 15° ☐ 24° ☐ 38°
☐ N64SF01 square / fixed	☐ L13 - 15W 1320lm	☐ B Black		☐ TW Tunable White 2000K-3000K	☐ 50°

Super Modular Design

Any parts could be replaced manually without tools

เปลี่ยนหลอดจากด้านหน้าโคม


 No tools

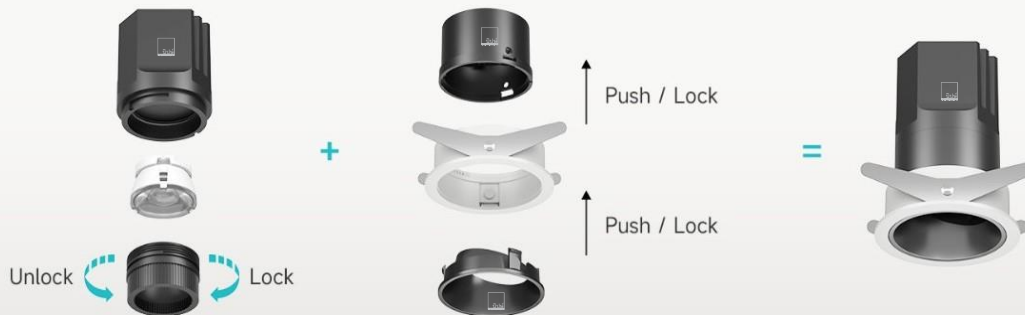


One LED Module shares numerous mounting rings



Color Sense Control

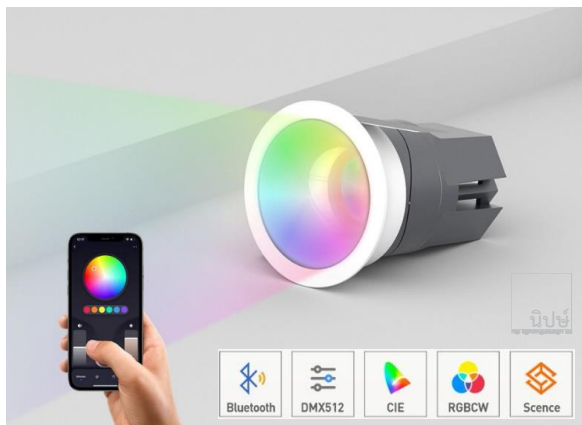

WALL WASHING SUGGESTED SPACING AND WALL DISTANCE

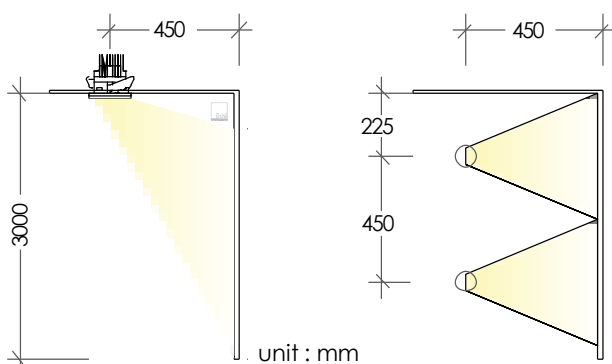

Ultra Easy Installation (6 Step)



Ceiling Thickness

