



Track light series

LED Track light, Narrow Beam version



GENERAL
IP20 Indoor lighting type
Very Narrow Beam 6°
Professional Art Museum Contour Projector

PRODUCT SPECIFICATIONS
Material : Die-cast aluminum body.
Frame Color : White, Black, Silver
Adjustable : 0°-90° tilt, 360° horizontally

LED LAMPS
LED type : COB
CRI : 90+
Color Consistency : SDCM ≤3
CCT : 2700K, 3000K, 3500K, 4000K
Beam angle : 6°
Average lifetime : 50,000h@80% (L80)
Warranty : 5 years limited warranty

INSTALLATION
☐ Track-mounted ☐ Pendant
☐ Surface-mounted ☐ Wall-mounted


ELECTRICAL (driver)
Input voltage : 220-240V, 50/60Hz
Power factor : >0.9

OPTICAL ACCESSORIES
☐ Honeycomb filter ☐ Soft lens




DIMMING CONTROL
☐ N = On-off ☐ T = TRIAC
☐ V = 0/1-10V ☐ D = DALI
☐ C = CASAMBI

DRAWING (mm) :

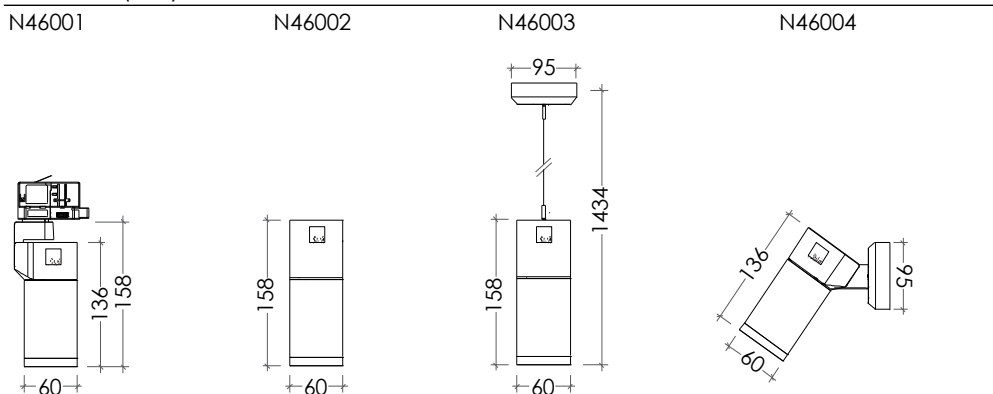


8 DIFFERENT LIGHT SHAPES

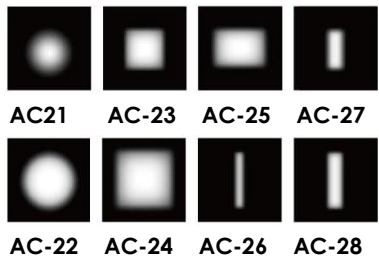

LIGHT DISTRIBUTION

10W 3000K 6°

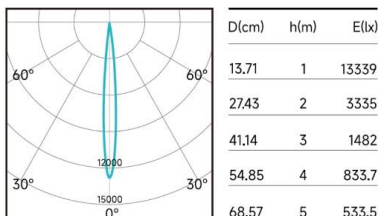

ORDER INFORMATION


CODE No.	LED POWER (W/LUMEN)	BEAM (D)	CRI (Ra)	CCT (K)	FRAME COLOR	TRACK TYPE
☐ N46001	☐ 10W	☐ 6°	☐ 90+	☐ 2700K	☐ W	☐ 02
☐ N46002	☐ 387-540lm		☐ SDCM ≤3	☐ 3000K	☐ White	☐ 2-pin
☐ N46003				☐ 3500K	☐ B	☐ 2-pin
☐ N46004				☐ 4000K	☐ Black	☐ 4-pin
					☐ S	☐ 41
					☐ Silver	☐ 4-pin
						☐ 63
						☐ 6-pin

Track light series

Professional Art Museum Contour Projector



EXCELLENT MODULAR COMBINATION CONCEPT

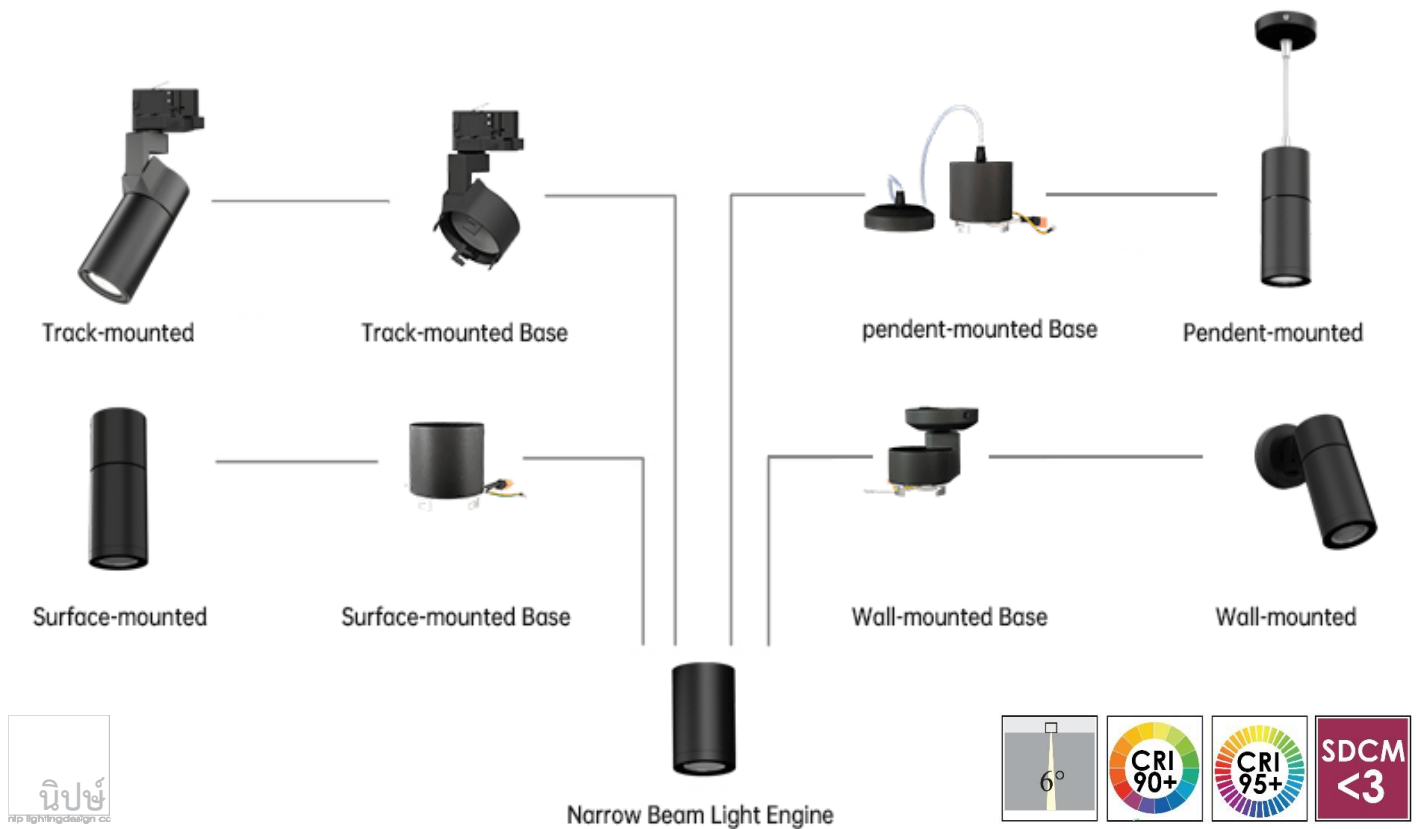


OPTICAL ACCESSORIES

- ☐ AC-01 Honeycomb
- ☐ AC-02 Cross louver
- ☐ AC-03 Snoot
- ☐ AC-04 Eye snoot
- ☐ AC-05 Wall wash ring
- ☐ AC-06 Barn door
- ☐ C-100 Surface mounting

Soft lens

- ☐ AC-21 Circular small
- ☐ AC-22 Circular big
- ☐ AC-23 Square small
- ☐ AC-24 Square big
- ☐ AC-25 Rectangular
- ☐ AC-26 Narrow line
- ☐ AC-27 Middle line
- ☐ AC-28 Wide line
- ☐ AC-29 Wall washing

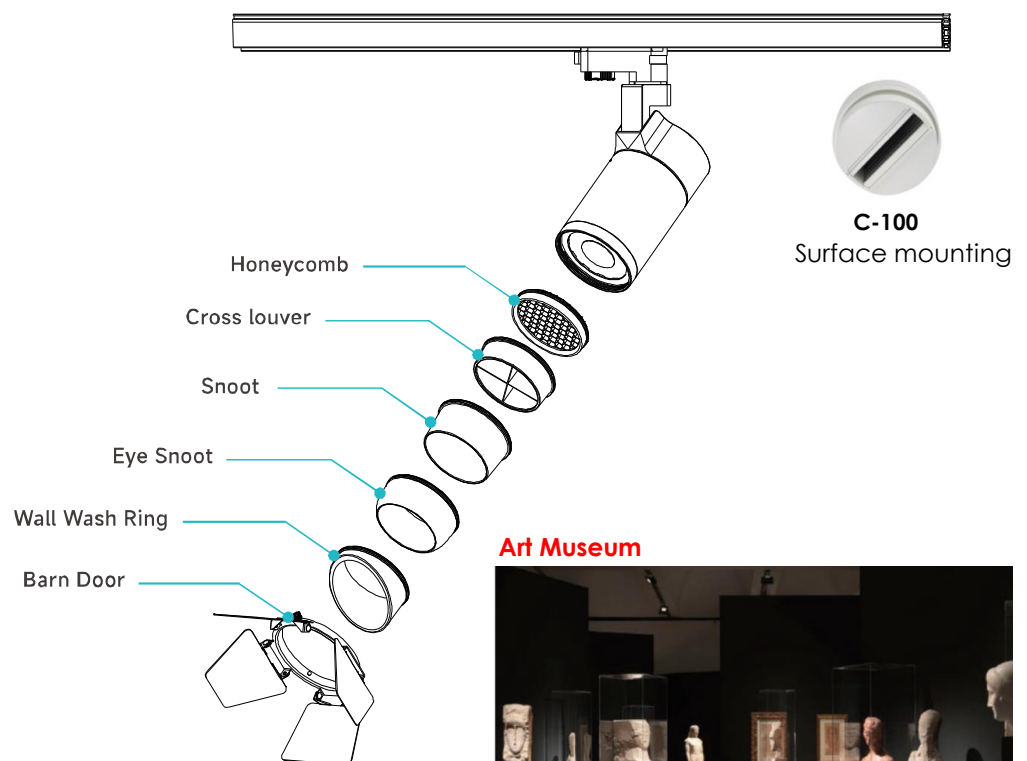


3-CIRCUIT DALI TRACK

3-CIRCUIT DALI TRACK SYSTEM








3-circuit 4 pin



3-circuit 6 pin



CONNECTING DIAGRAM

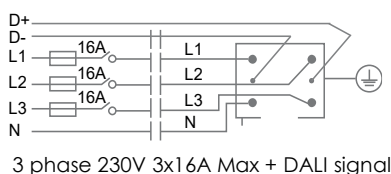

Track light Series

3-CIRCUIT DALI TRACK SYSTEM

GENERAL

IP20 Indoor lighting type
Surface mounted DALI 3-phase track

PRODUCT SPECIFICATIONS

Main materials : Copper + Aluminum.
Frame Color : White, Black, Grey
Rated voltage per circuit : 230V / 16A

DIMMING CONTROL

- ☐ N = On-off ☐ T = TRIAC
☐ V = 0/1-10V ☐ D = DALI
☐ C = CASAMBI



INSTALLATION

- ☐ Surface mounted.
☐ Recessed mounted.

DRAWING (mm) :


N40410-S (3-circuit 4 pin)

Surface type




N40410-R (3-circuit 4 pin)

Recessed type




N40610-S (3-circuit 6 pin)

Surface type



N40610-R (3-circuit 6 pin)

Recessed type



ORDER INFORMATION

CODE No.	NET WEIGHT (Kg.)	LENGTHS (mm)	FRAME COLOR (Standard)
☐ N40410-S	0.84	☐ 1000	☐ W
☐ N40420-S	1.68	W35.2xL1000xH35.5	White
☐ N40430-S	2.52	☐ 2000	☐ B
☐ N40440-S	3.36	W35.2xL2000xH35.5	Black
☐ N40410-R	0.92	W35.2xL3000xH35.5	☐ G
☐ N40420-R	1.84	☐ 4000	Grey
☐ N40430-R	2.76	W35.2xL4000xH35.5	
☐ N40610-S	0.92		
☐ N40620-S	1.83		
☐ N40630-S	2.75		
☐ N40640-S	3.67		
☐ N40610-R	1.02		
☐ N40620-R	2.03		
☐ N40630-R	3.04		

MINI 1-CIRCUIT TRACK


1-CIRCUIT TRACK SYSTEM



Mini 1-circuit 2 pin



CONNECTING DIAGRAM



1 phase 230V 16A Max

Track light Series

MINI 1-CIRCUIT TRACK SYSTEM

GENERAL

IP20 Indoor lighting type
Mini Surface mounted single circuit track

PRODUCT SPECIFICATIONS

Main materials : Copper + Aluminum.
Frame Color : White, Black, Grey
Rated voltage per circuit : 230V / 16A

DIMMING CONTROL

- ☐ N = On-off
☐ V = 0/1-10V
☐ C = CASAMBI
- ☐ T = TRIAC
☐ D = DALI


INSTALLATION

- ☐ Surface mounted.

DRAWING (mm) :

N40210-M (1-circuit 2 pin)


Surface type



ORDER INFORMATION

CODE No.	NET WEIGHT (Kg.)	LENGTHS (mm)	FRAME COLOR (Standard)
☐ N40210-M	0.48	☐ 1000	☐ W
☐ N40220-M	0.98	W26.2xL1000xH22.2	White
☐ N40230-M	1.46	☐ 2000	☐ B
		W26.2xL2000xH22.2	Black
		☐ 3000	☐ G
		W26.2xL3000xH22.2	Grey

SUSPENSION & ACCESSORIES

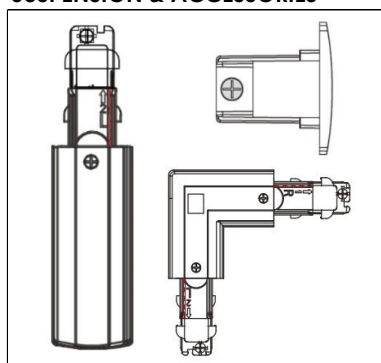


ORDER INFORMATION For SUSPENSION & ACCESSORIES

CODE No.	TRACK TYPE	FRAME COLOR (Standard)
☐ Connector Left	☐ 21 / Mini 1-circuit 2-pin	☐ W
☐ Connector Right		White
☐ End Cap	☐ 43 / 3-circuit 4-pin	☐ B
☐ I Coupler		Black
☐ I Coupler (Insulation)	☐ 41 / DALI 1-circuit 4-pin	☐ G
☐ Middle Connector		Grey
☐ L Connector Left	☐ 63 / DALI 3-circuit 6-pin	
☐ L Connector Right		
☐ T Connector Left		
☐ L Connector Recessed Cover		
☐ T Connector Recessed Cover		
☐ X Connector Recessed Cover		
☐ Suspension Connection Clamp		
☐ Wire Suspension EZCLICK 5M		
☐ Wire suspension holder EZCLICK		
☐ T-Bar EZCLICK		
☐ Mounting Clamp		

1-CIRCUIT TRACK


1-CIRCUIT TRACK SYSTEM



1-circuit 2 pin



CONNECTING DIAGRAM



1 phase 230V 16A Max

Track light Series 1-CIRCUIT TRACK SYSTEM

GENERAL

IP20 Indoor lighting type
Surface mounted single circuit track

PRODUCT SPECIFICATIONS

Main materials : Copper + Aluminum.
Frame Color : White, Black
Rated voltage per circuit : 230V / 16A

DIMMING CONTROL

- ☐ N = On-off ☐ T = TRIAC
☐ V = 0/1-10V ☐ D = DALI
☐ C = CASAMBI


INSTALLATION

- ☐ Surface-mounted.

DRAWING (mm) :

N40210-S (1-circuit 2 pin)


Surface type



ORDER INFORMATION

CODE No.	NET WEIGHT (Kg.)	LENGTHS (mm)	FRAME COLOR (Standard)
☐ N40210-S	0.31	☐ 1000	☐ W
☐ N40220-S	0.64	W34xL1000xH22	White
☐ N40230-S	0.96	☐ 2000	☐ B
		W34xL2000xH22	Black
		☐ 3000	
		W34xL3000xH22	

ACCESSORIES

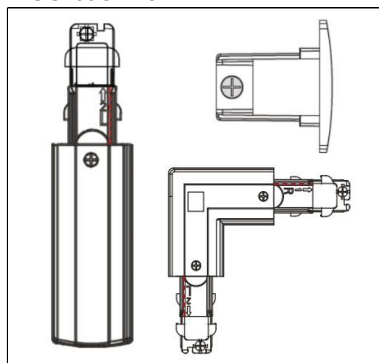

ORDER INFORMATION For ACCESSORIES

CODE No.	TRACK TYPE	FRAME COLOR (Standard)
☐ Connector	☐ 02 / 1-circuit	☐ W
☐ End Cap	2-pin	White
☐ I Coupler		☐ B
☐ L Connector		Black