



N2125GR / N2150GR




DETAILS

Magnetic Reflector




ANTI-GLARE Low UGR < 16

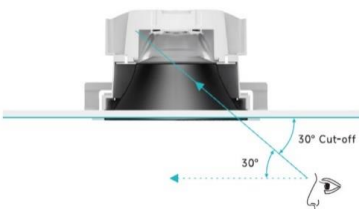


LIGHT DISTRIBUTION

25W 3000K 38°

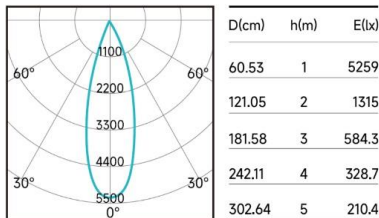

45W 3000K 50°

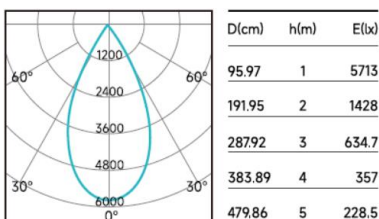

HIGH CEILING Series

Recessed Downlight (Low UGR<16),
25W / 30W / 35W / 40W / 45W

GENERAL

IP20 Indoor lighting type
IP54 Waterproof (Option)
High Ceiling from 5m to 12m.

SPECIFICATION

Material : Die-cast aluminum body.
Frame Color : White, Black, Silver
Trim Color : White, Black, Silver
Optical : cut-off 30° (UGR<16)

LED LAMPS

Module COB
CRI : 90+
Color Consistency : SDCM ≤3
CCT : 2700K, 3000K, 4000K, 5000K
Tunable White : 2700K - 5000K
Full Spectrum : RGBCW
Beam angle : 24°, 38°, 50°
Average lifetime : 50,000h@80% (L80)
Warranty : 5 years limited warranty

SECONDARY REFLECTOR COLOR

☐ Black ☐ Matte Silver
☐ Gold ☐ Bright Silver

INSTALLATION

Recessed mounted.
* Mounting Rod

ELECTRICAL (driver)


Input voltage : 220-240V, 50/60Hz
Power factor : >0.9

DIMMING CONTROL


☐ N = On-off ☐ T = TRIAC
☐ V = 0/1-10V ☐ D = DALI

DRAWING (mm) :

N2125GR

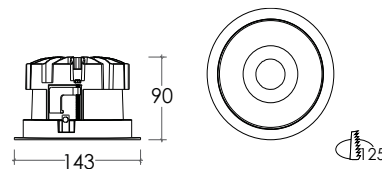

N2150GR

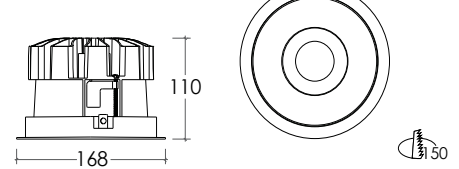

ORDER INFORMATION

CODE No.	LED POWER (WATT/ LUMEN)	TRIM COLOR	CRI (Ra)	CCT (K)	BEAM (D)
☐ N2125GR	☐ 25W 1948-2056lm. ☐ 30W 2591-2672lm. ☐ 35W 2967-3023lm.	☐ W White ☐ B Black ☐ S Silver	☐ 90+ SDCM ≤3	☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ TW Tunable White 2700K-5000K ☐ FS Full Spectrum RGBCW	☐ 24° ☐ 38° ☐ 50°
☐ N2150GR	☐ 40W 3797-3926lm. ☐ 45W 4030-4162lm.				

